


# Ducted Systems

Heating and cooling solutions

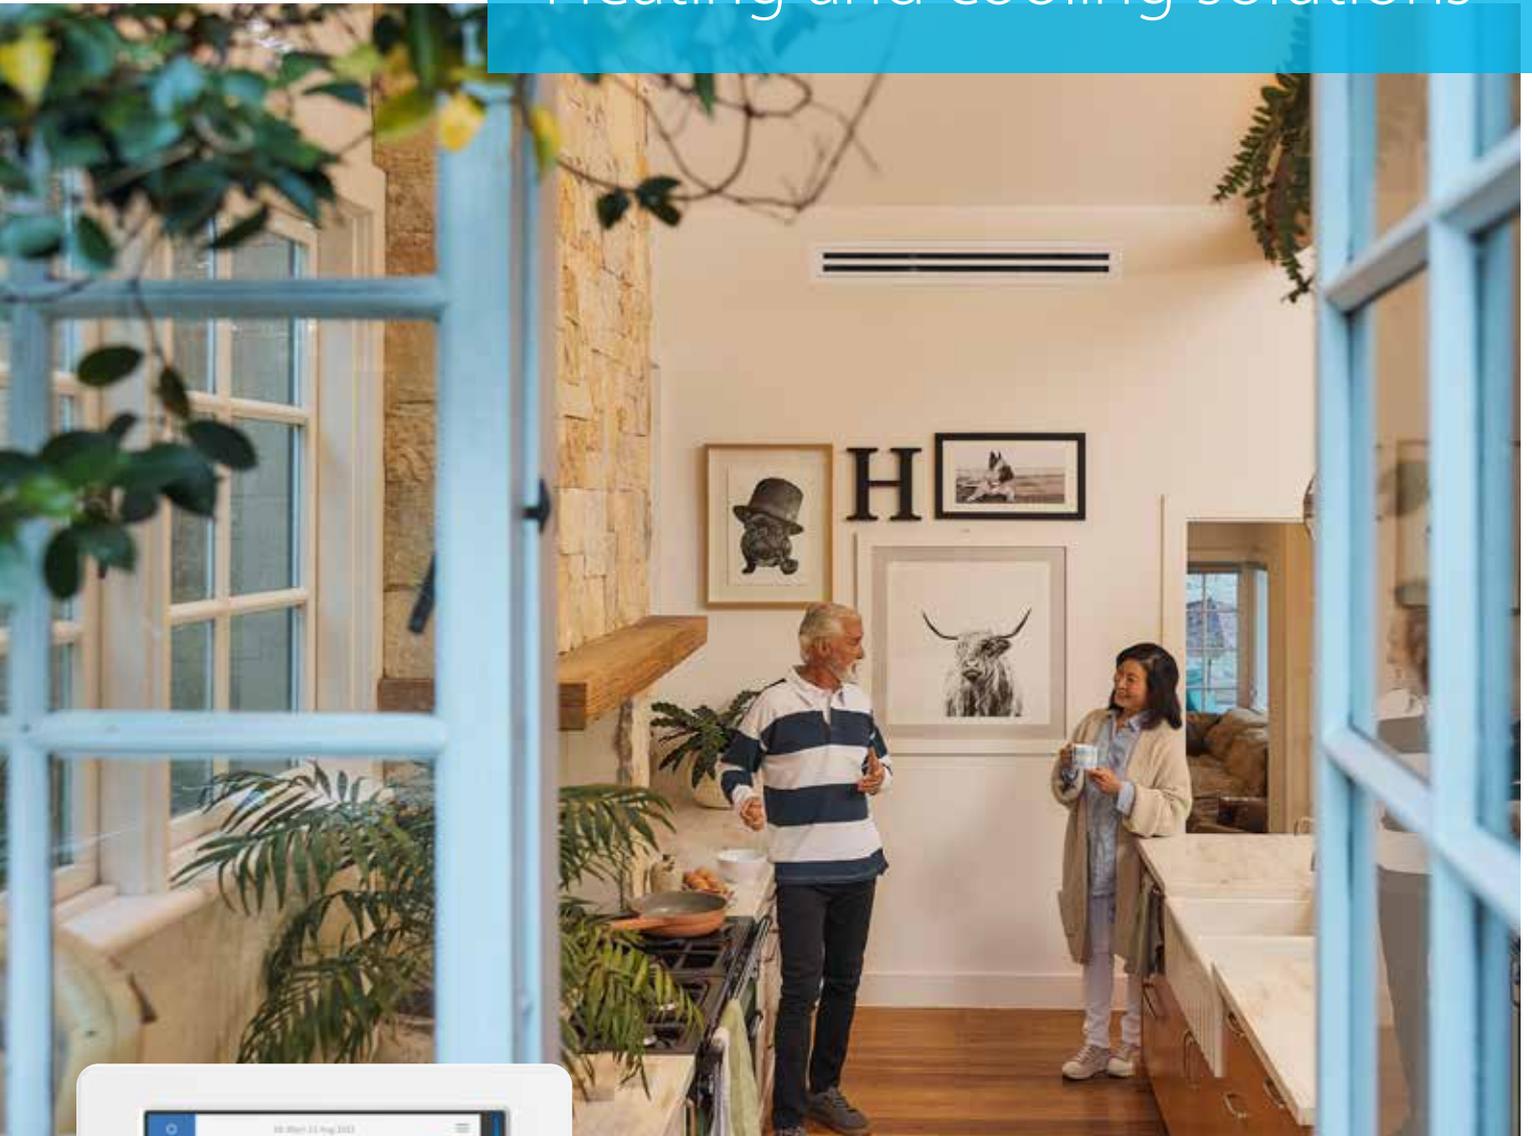

# Perfecting the Air

Every day we breathe in 10,000 litres of air. It nourishes us. Enriches us. A deep breath of clean air is exactly what nature intended. It's amazing that something we can't see can make such a difference to our health and well-being – and it's why we believe every breath should be 'perfect'.

At Daikin, we've been 'perfecting the air' for over 50 years to make your home a calm and comfortable place – for you and your family.

As 'Air Specialists', Daikin is driven to improve all aspects of indoor air quality - from temperature and humidity, to flow and cleanliness.



# Contents

|  |    |
|--|----|
| Daikin Ducted Air                      | 4  |
| Trusted name                           | 6  |
| What is Seasonal Performance?          | 7  |
| Daikin technology                      | 8  |
| Premium Inverter Ducted                | 10 |
| Inverter Ducted                        | 12 |
| FBA Slimline Ducted                    | 14 |
| FDYBA Bulkhead System                  | 15 |
| Daikin AirHub                          | 16 |
| Standard controllers                   | 18 |
| Daikin Airbase                         | 20 |
| Features checklist                     | 22 |
| Features and benefits                  | 23 |
| Product specifications                 | 24 |
| Why choose a Daikin Specialist Dealer? | 31 |

# Daikin Ducted Air

## Whole house comfort

Ensuring your new home is designed with Daikin ducted air conditioning for heating and cooling when and where it's needed will enable you and your family to live comfortably.

Comprised of a concealed indoor unit, a sophisticated zone controller and a compact outdoor unit, Daikin ducted air conditioning provides high-performance comfort without compromising on your home's overall aesthetic.


## AirFX

Daikin's exclusive AirFX range of ducted installation accessories is designed to meet relevant Australian standards and to ensure your ducted system operates efficiently and reliably.

Did you know that in summer, your roof temperature can reach upwards of 80°C? Under such extreme roof temperature, up to 30% of the capacity delivered through your ducted system may be lost through the flexible duct network, impacting both your comfort and power bills.

To get the most out of your ducted system, always insist that compliant flexible duct is installed with an insulation R-Value\* rating appropriate to your climate zone. Daikin AirFX flexible duct is also manufactured in Australia, supporting our local industries.

## Daikin Ducted and AirFX accessories

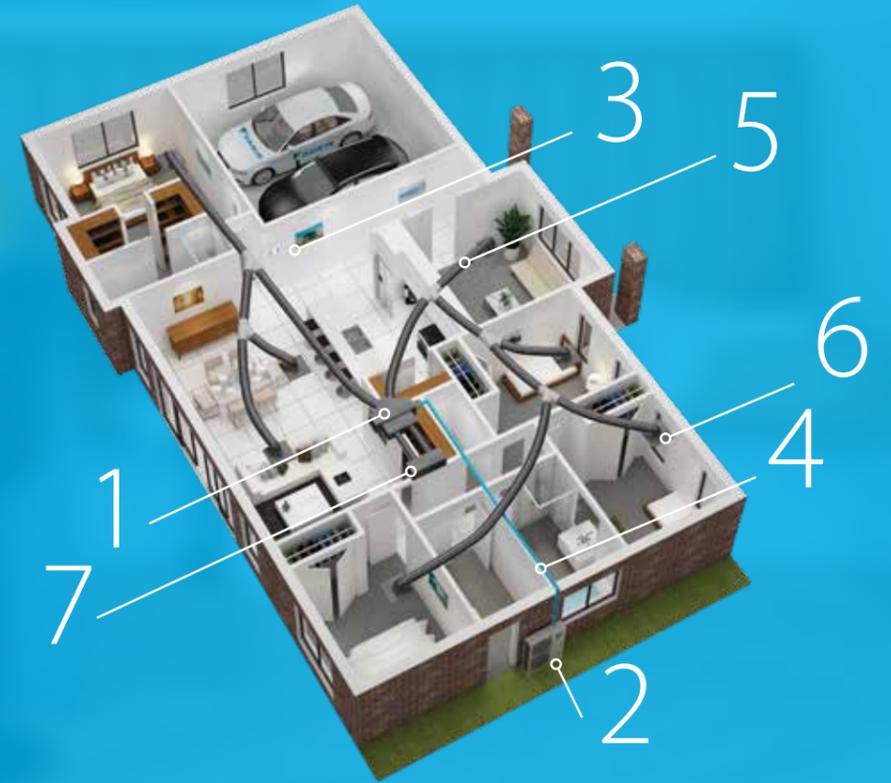

## Comfort all year round



### 1. Indoor unit

Concealed in the ceiling, the indoor unit continually draws in return air over its heat exchanger and blows cooled or heated air back into your home.



### 3. Zone Controller

Up to 8 zones can be managed from the Zone Controller. Zones can be turned On or Off and with our AirHub Linear Zone Controller, zone temperature can be adjusted  $\pm 2^{\circ}\text{C}$  of the set point.



### 2. Outdoor unit

Featuring inverter technology, the outdoor unit takes the hot or cold air from the indoor unit and expels it outside.



### 4. Refrigerant pipes

These pipes are concealed out of sight and form the conduit for transferring heat between the indoor unit and outdoor unit via the refrigerant cycle.



### 5. Flexible duct

Flexible duct distributes conditioned air throughout the home. Ensure the duct used is well insulated to minimise heat loss. This will ensure your ducted system works as efficiently as possible.



### 6. Supply air diffusers

Conditioned air is delivered into your indoor home environment via supply air diffusers. A selection of diffusers is available to suit your home's design aesthetic.



### 7. Return air grilles

These grilles are the pathway for air from your home to be conditioned by the ducted system. A detachable filter is included to remove household dust.

\*R1.0, R1.5 or R2.0 based on the climate zone you're in and AS/NZS 4254.1 & AS/NZS 4859.1 certified.

## Proudly Australian Made

When you choose a Daikin ducted system, you're choosing a piece of Australia. Designed and built right here on our shores, Daikin's local manufacturing teams produce more than 400 indoor units every day. Each unit reflects our ongoing commitment to quality and supporting local industry and jobs.



## Trusted Brand

Daikin is proud to be the back-to-back winner of the Trusted Brands in Air Conditioning award, as commissioned by Reader's Digest Australia. This recognition, independently surveyed by Catalyst Research, involved more than 4,300 Australians who collectively voted Daikin as the most trusted air conditioner brand in 2023 to 2025.



## Finder Awards

Daikin has also been awarded Australia's Most Reliable Air Conditioner Brand in the Finder Customer Satisfaction Awards in both 2024 and 2025.

Voted by real Australians, Daikin topped the categories of reliability, ease of use, and top performance while highly commended in being most loved, easy to clean and a highly recommended Brand.

## Serious About Service

Our commitment to Australians extends well beyond manufacturing and awards. With a nationwide network of expert dealers and service agents, Daikin ensures continued comfort and peace of mind, supporting our products and customers across the country for years to come.




# What is Seasonal Performance?

Air conditioning units receive seasonal performance ratings which take into consideration the local climate where the air conditioner is installed and the seasonal temperature differences experienced throughout the year.

The rating system divides Australia into three distinct climate zones; hot, average and cold. Air conditioning systems will perform differently depending on where they're installed, so it's important to choose the right model for your zone.

Each model is given a Total Cooling Seasonal Performance Factor (TCSPF) rating and a Heating Seasonal Performance Factor (HSPF) rating. The greater the TCSPF and HSPF ratings, the more efficient the air conditioner will be.

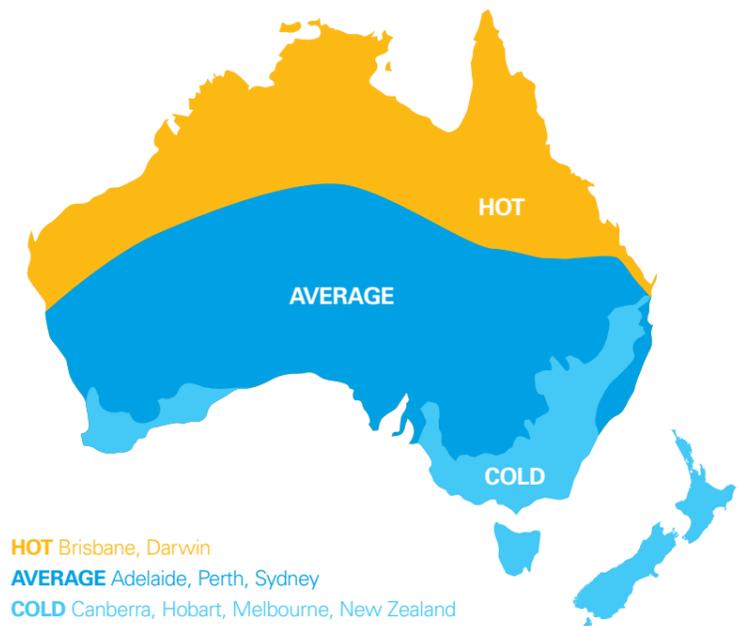


### Example (seasonal performance – residential)

| MODEL                      | ZONE    | TCSPF | HSPF |
|----------------------------|---------|-------|------|
| FDYA160AV19<br>RZAS160C2V1 | HOT     | 4.77  | 4.55 |
|                            | AVERAGE | 4.37  | 3.97 |
|                            | COLD    | 4.55  | 3.41 |

TCSPF/HSPF refers to the seasonal efficiency of an air conditioner as outlined in the GEMS 2019 Determination.  
 TCSPF: Total Cooling Seasonal Performance Factor as per AS/NZS 3823.4.1:2014.  
 HSPF: Heating Seasonal Performance Factor as per AS/NZS 3823.4.2:2014.


# Daikin Technology

Indoor Unit

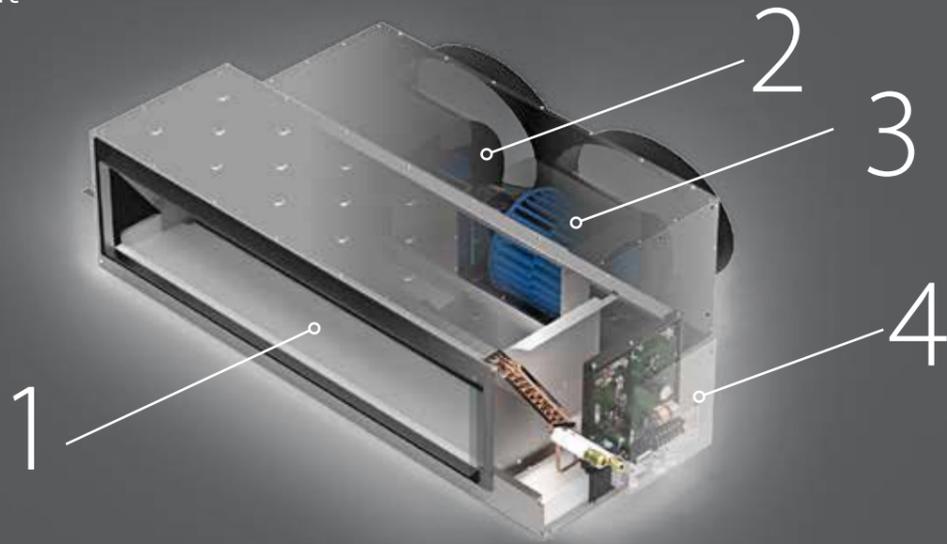

For over 90 years, Daikin has invested heavily in Research and Development to deliver more effective climate control for you and your family. Daikin technologies help make Daikin air conditioners energy efficient, powerful, reliable and easy to use.


Outdoor Unit

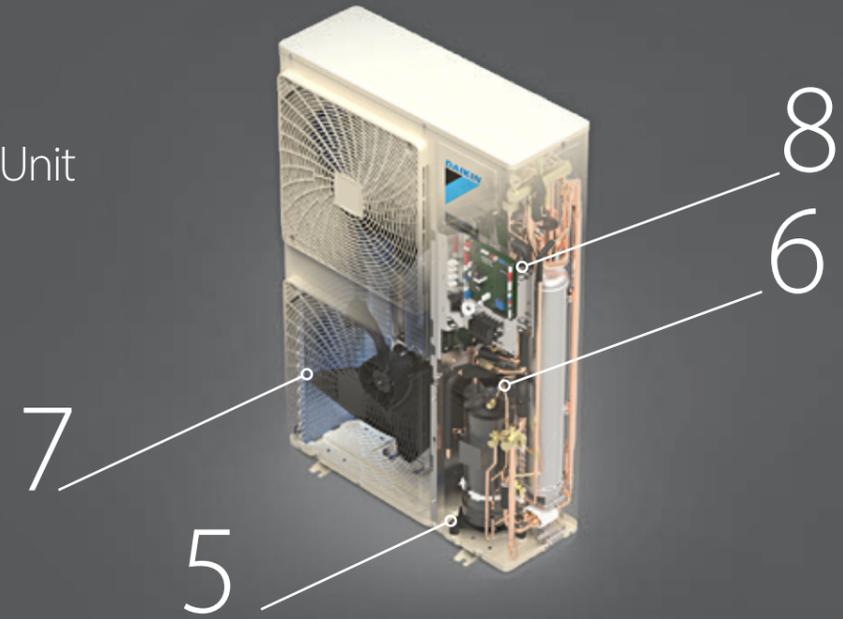

**1. Indoor heat exchanger**  
Our new indoor heat exchangers have been designed to deliver maximum capacity output in a compact casing size. Through the use of cutting-edge technologies, our indoor heat exchangers utilise 5mm copper pipes to ensure heat is removed from your home efficiently.




**3. Sirocco fan**  
Daikin's ducted units are fitted with lightweight single injection moulded Sirocco Fans. These fans feature an aerodynamic fan blade design which reduces turbulence for a more efficient and quieter delivery.



**5. Inverter compressor**  
Daikin's swing and scroll DC sine wave inverter compressors are quieter and more efficient than conventional compressors thanks to their high pressure dome construction and the usage of high pressure lubrication oil.



**7. Saw edge fan blade**  
The addition of a saw tooth edge at the rear of the blade smooths air flow over the blade surface, reducing turbulence which in turn results in a quieter, more efficient means of delivering comfort to your home.



**2. DC fan motor**  
Daikin indoor units are equipped with a high-efficiency DC fan motor. By utilising high-power permanent magnets instead of the induced magnetism of conventional AC motors, Daikin's DC motor can deliver significantly higher motor efficiency.



**4. Enhanced reliability**  
The indoor unit's fail safe logic is designed for the harsh Australian summer. Fan speed is regulated on start-up when roof temperatures are at an extreme level for enhanced reliability.



**6. Reluctance DC motor**  
Daikin's Reluctance DC motor utilises the magnetic torque of neodymium magnets in conjunction with reluctance torque, resulting in more energy efficient operation. These neodymium magnets are 10 times stronger than conventional ferrite magnets.



**8. Refrigerant cooled PCB**  
The heat produced by the inverter PCB module is cooled by a sub heat exchanger\* that provides stable operation, enhanced reliability and continuous operation up to 52°CDB ambient^.

\*Refrigerant Cooled PCB only applicable to RZAS71-160C2V1, RZAS180-200DY1, RZA85-160C2V1 & RZA71-160C2Y1.  
^52°CDB ambient only applicable to RZAS180-200DV(Y)1, check pages 24 to 30 for other models.

Our Premium Inverter series pushes the envelope on performance. Designed in Australia with Certified Australian Made indoor units to maximise efficiency, simply connect it to any of our easy to use controllers and enjoy quiet, reliable air conditioning.



**9** SINGLE + THREE PHASE  
R32 MODELS  
7.1kW - TO - 20.0kW  
CAPACITY RANGE

**4** THREE PHASE  
R410A MODELS  
18.0kW - TO - 24.0kW  
CAPACITY RANGE

## Premium Inverter Ducted



### Superior energy performance

Engineered with features such as a redesigned Cross-Pass Heat Exchanger on the outdoor unit, DC Fan motor on the indoor unit and Daikin's patented swing compressor, our new Premium Inverter series takes energy efficiency to the next level.



### Night Quiet Mode

Our outdoor units are amongst the quietest on the market. If the noise levels need to be further reduced, engaging the Night Quiet Mode feature will reduce the noise levels by 4dBA<sup>^</sup>.



### R32 refrigerant

R32 is the next generation in refrigerants with a substantially lower 'Global Warming Potential Factor' than R410A, providing less risk of harm to the environment\*.



### Automatic Airflow Adjustment

Utilising the DC fan technology on our indoor unit, the Automatic Airflow Adjustment feature ensures the indoor fan operates at the appropriate settings to automatically deliver the optimum airflow to your home always.



### Design flexibility

The side discharge configuration of the outdoor unit enables convenient installation onto the narrow side access of modern homes. Additionally, the indoor unit can also be separated into 2 sections for easy installation and retrofitted into existing homes.



### Increased operation limits

Built for the harsh Australian climate, the refrigerant cooled PCB technology incorporated in the outdoor unit enables continuous operations up to 52°C ambient.

Proudly Australian Made



### Heating Focus option

Heating Focus models are available in 180, 200 and 250 Class models. These models provide improved heating performance at low ambient temperatures, ideal for cold climate zones such as Canberra, Hobart & Melbourne. These models are not R22 retrofit capable.

### Daikin Airbase

Control your ducted from anywhere with the Airbase app (optional accessory).



\*Applies to FDYA71-200AV1(9) models.

<sup>^</sup>Outdoor sound levels are determined in an anechoic chamber and may differ once the unit is installed due to ambient conditions.

Note: R32 ducted indoor units must be installed in the ceiling space. Not suitable for under floor installation. Excludes FDYA180-200AV1, these models have optional R32 Safety Measures to comply with AS/NZS 60335.2.40 under certain conditions, please refer to the installation manual for further details.

Engineered in Australia with Certified Australian Made indoor units, our Inverter Series is the premier choice where size is key. Designed to fit in tight roof spaces of modern homes, choose Inverter ducted for the compact choice that provides comfort you can rely on.



|                                    |  |  |                                     |                           |   |
|------------------------------------|--|--|-------------------------------------|---------------------------|---|
| <p><b>14</b></p> <p>R32 MODELS</p> | <p>SINGLE<br/>+<br/>THREE</p> <p>PHASE OPTIONS</p> | <p>5.0kW<br/>- TO -<br/>15.5kW</p> <p>CAPACITY RANGE</p> | <p><b>3</b></p> <p>R410A MODELS</p> | <p>THREE</p> <p>PHASE</p> | <p>18.0kW<br/>- TO -<br/>23.5kW</p> <p>CAPACITY RANGE</p> |
|------------------------------------|--|--|-------------------------------------|---------------------------|---|

## Inverter Ducted



### Improved energy performance

Adopting advanced technologies such as a DC Fan motor, Cross-Pass Heat Exchanger on the outdoor unit with increased heat exchange area and Daikin's patented swing compressor, our new Inverter series is designed to operate with improved efficiencies throughout the year.



### Night Quiet Mode

Our outdoor units are amongst the quietest on the market. If the noise levels need to be further reduced, engaging the Night Quiet Mode feature will reduce the noise levels by 4dBA\*.



### Expanded 3 phase range

Designed for homes with a 3 phase power supply in place, our new R32 Inverter series ensures a simple and convenient installation without the need to worry about unbalanced electrical loads at your electrical distribution board.



### Automatic Airflow Adjustment

Utilising the DC fan technology on our indoor unit, the Automatic Airflow Adjustment feature ensures the indoor fan operates at the appropriate settings to automatically deliver the optimum airflow to your home.



### Space saving outdoor unit

The Inverter series outdoor units are more compact than ever before. Models up to 200 Class are now encased in a space saving side discharge outdoor unit, allowing you to place the unit on the side access of your home and not compromise its external appearance.



### Compact indoor unit

Today's modern home designs are maximising living spaces with higher ceilings resulting in shallower roof spaces. Our Inverter series features compact indoor units with a low profile height of ≤360mm allowing them to fit comfortably into modern homes.

Proudly Australian Made



### Daikin Airbase

Control your ducted from anywhere with the Airbase app (optional accessory).



\*Outdoor sound levels are determined in an anechoic chamber and may differ once the unit is installed due to ambient conditions.  
Note: R32 ducted indoor units must be installed in the ceiling space. Not suitable for under floor installation.

# FBA Slimline Ducted



Optional Accessory



## Compact design

The new and improved FBA series has been designed to meet the construction challenges of modern commercial and medium density apartment development.



### R32 refrigerant

R32 is the next generation in refrigerants with a substantially lower 'Global Warming Potential Factor' than R410A, providing less risk of harm to the environment.



### Superior design

With an industry-leading compact size (245mm height), DC Fan on the indoor unit with an ESP of 150Pa and a built-in condensate pump with a lift of up to 850mm, the new and improved FBA unit is ideal for applications with tight ceiling spaces. The 85m (100-140 Class) pipe run also enables greater flexibility in the placement of the outdoor unit.



### Automatic Airflow Adjustment

Automatic Airflow Adjustment feature allows the fan speed to adjust automatically to suit your duct design during commissioning, simplifying the process and saving time.

**15** R32 MODELS  
**SINGLE + THREE** PHASE OPTIONS  
**5.0kW - TO - 14.0kW** CAPACITY RANGE

Note: R32 ducted indoor units must be installed in the ceiling space. Not suitable for under floor installation.



# FDYBA Bulkhead System



Optional Accessory



3-D Auto Swing Grille option installed.

## Efficient & discreet

The new R32 FDYBA Bulkhead fits flush into the ceiling with only the suction air and discharge grilles visible inside your home and leaving maximum floor and wall space for furniture, decoration and fittings.



### Compact performance

Offering maximum performance in a compact, 450mm deep package, this model is ideal for wardrobe installations where space is at a premium.



### 3-D Auto Swing Grille (Option)\*

Vertical & horizontal motorised louvres installed in front of the bulkhead provide 3-D airflow distribution, circulating air to all corners of the room.



### Auto Clean Air Filter Module (Option)^

The Auto Clean Filter Module keeps the internal filter clean by collecting dust and storing it in a convenient vacuum port for easy removal.

### Australian Made

FDYBA Bulkhead indoor units are specifically designed and manufactured in Sydney, NSW to perform in Australian conditions.



**5** R32 MODELS  
**SINGLE** PHASE  
**2.5kW - TO - 7.1kW** CAPACITY RANGE

\*BDG20A09A1 for 25 Class, BDG20A15A1 for 35-50 Class & BDG20A20A1 for 60-71 Class. Only compatible with BRC1E63 controller.  
 ^BAE20A62 for 25 Class, BAE20A82 for 35-50 Class & BAE20A102 for 60-71 Class (all models extend depth by 188mm). Only compatible with BRC1E63 controller.  
 Note: R32 Bulkhead indoor units are not suitable for under floor installation.

Daikin's AirHub Touch Zone Controller with its contemporary design, intuitive controls and innovative features will give you the flexibility to deliver precise temperature control and ultimate comfort where it is needed in your home.



Wired Sensor

Wireless Sensor

## AirHub comes in two versions

### 1. ON/OFF ZONE CONTROL\*

Allows users to air-condition occupied zones and switch off unoccupied zones. Features Airside Control.



Example: Temperature set point @ 22°C in all ON zones

### 2. LINEAR ZONE CONTROL\*\*

Enables users to switch zones on and off as well as set the zone temperature to within ±2°C. Features Opti-Zone Control.



For Linear Control, a remote temperature sensor is required for each zone. Wired or wireless options are available.

Example: Main temperature set point @ 22°C with a ±2°C range

\*Only compatible with all Premium Inverter and Inverter Ducted models, however Airside Control feature is not available on R410A (FDYQN) Inverter Ducted models.  
\*\*Only compatible with R32 (FDYA) Premium Inverter and R32 (FDYAN) Inverter Ducted models.

# Daikin AirHub

Ultimate air control for your home



## Features

- › 7" colour resistive touch screen interface housed in a contemporary casing design with a matte white finish.
- › Both On/Off or Linear Control options available in either a 4 or 8 zone design.
- › Flush mounted 11mm off the wall for a clean, minimalistic look.
- › Weekly Schedule Timer with individual zone timer, for programming the system and individual zones on or off at set times of the week.
- › Optional wireless remote temperature sensors, ideal for homes with internal brick walls.
- › Eco settings such as Setpoint Range Limit, Setpoint Auto Reset and Auto Off Timer enables you to easily reduce your ducted system's energy consumption.

| AIRHUB ITEMS             |  |
|--------------------------|--|
| BRCMTZCB9                | Main Zone Controller                     |
| BRCSTZCB9                | Sub Zone Controller                      |
| BRC24TZ4B9               | 4 Zone, On/Off Zone Controller Box (24V) |
| BRC24TZ8B9               | 8 Zone, On/Off Zone Controller Box (24V) |
| BRC24TLZ4B9              | 4 Zone, Linear Zone Controller Box (24V) |
| BRC24TLZ8B9              | 8 Zone, Linear Zone Controller Box (24V) |
| BRC501A-1                | Wired Temperature Sensor                 |
| BRYW1B1-1                | Wireless Temperature Sensor              |
| BRYW1B1-2                | Wireless Sensor Receiver                 |
| CONTROLLER SPECIFICATION |  |
| HxWxD (mm)               | 134x232x64 (11mm Flush)                  |
| Screen (Diagonal)        | 7.00"                                    |
| SENSOR SPECIFICATION     |  |
| Wired - HxWxD            | 50x60x20                                 |
| Wireless - DIAxD         | Ø67x15                                   |

**Tip!** Need a second controller? Daikin Airbase is a great option! Airbase compatible

## What is Airside Control?

As zones are turned off, the indoor unit fan reduces speed between 60-100% of the nominal airflow rate to meet the airflow requirement of the remaining open zones for quieter operation and greater energy savings.

## What is Optizone Control?

OptiZone Control will automatically regulate the individual zone dampers to deliver precise airflow to meet the temperature settings and heat load of each zone. As the zone dampers adjust, the indoor unit fan speed will intelligently regulate between 30-100% of the nominal airflow rate to deliver the required airflow to maintain the comfort levels of each zone.

On days when the heat load is mild or low, significant energy savings can be achieved through OptiZone Control, truly optimising the system for ultimate comfort.

At Daikin, we have a range of other controllers available to control your ducted air conditioning system to suit your lifestyle needs.



# Standard controllers

## Zone Controller (On/Off Control Only)

### Features

- › Backlit display with easy-to-read text.
- › Three different timer and time clock operations for precise, programmable control for your home.
- › Countdown On-Off timer, programmable in 1 hour increments for up to 12 hours.
- › A simple 7-day Time Clock, to program the controller to turn the system on or off at set times any day of the week. Two different on and off programs can be set for each day of the week.
- › An advanced 7-day Time Clock extends the functionality of the Simple 7-day Time Clock with advanced features such as Zone Control and Temperature Sensor Selection, for the ultimate in-home comfort.
- › Airside Control when connected with Premium Inverter (71-250 Class) and Inverter (50-160 Class) Ducted models.



(Optional upgrade with Premium Inverter Ducted and Inverter Ducted models)

| ZONE CONTROLLER MODEL NO: |                              |
|---------------------------|------------------------------|
| BRC230Z4B9                | Up to four zones (230-240v)  |
| BRC230Z8B9                | Up to eight zones (230-240v) |
| BRC24Z4B9                 | Up to four zones (24v)       |
| BRC24Z8B9                 | Up to eight zones (24v)      |
| BRC5ZC19                  | Sub Zone Controller          |
| SPECIFICATION             |                              |
| HxWxD (mm)                | 120x170x24                   |
| Screen (Diagonal)         | 3.17"                        |

**Tip!** Need a second controller? Daikin Airbase is a great option!  Airbase compatible

## Nav Ease Controller

### Features

- › Clear, backlit display with easy-to-read text.
- › Weekly schedule timer, to program on and off times.
- › Home Leave function can turn your air conditioner on automatically when room temperatures drop below 10°C.
- › Quick Cool / Heat mode, which temporarily increases air conditioning power to more rapidly reach your desired operating temperature, before automatically returning to normal operation.
- › Set Temperature Mode Changeover, automatically switches from a cooling to heating cycle, or a heating to cooling cycle at pre-set points.
- › Temperature Limit, to predefine a temperature range for cooling or heating cycles, helping you reduce your energy consumption.



(Included with Premium Inverter Ducted and Inverter Ducted models)

| NAV EASE MODEL NO: BRC1E63 |            |
|----------------------------|------------|
| SPECIFICATION              |            |
| HxWxD (mm)                 | 120x120x19 |
| Screen (Diagonal)          | 3.33"      |

**Tip!** Need a second controller? Daikin Airbase is a great option!  Airbase compatible

#### Notes:

1. Premium Inverter, Inverter & Slim-Line Ducted models are compatible with Nav Ease & Zone Controller, Bulkhead models are only compatible with Nav Ease Controller
2. Airside Control function regulates the fan RPM between 60% to 100% of the indoor unit's nominal airflow rate
3. Airbase is not compatible with Sub Zone Controller



Operation mode

Push notification

On/off Timer

Zone Control

**Smart home**  
 With Daikin Airbase your ducted system can now be part of the Google and Amazon home automation ecosystem alongside 3rd party supplied lights, garage doors, security systems etc.

By linking your Airbase account with Google Home or Amazon Alexa, the Daikin ducted system can be operated directly from their companion app or smart speaker.

"Hey Google, turn on the aircon"

Amazon Alexa Enabled  
Google Assistant Enabled

Google/Amazon Smart Speaker and Home Automation Ecosystem Purchased Separately

# Daikin Airbase

## Control at your fingertips

Daikin Airbase puts your ducted system's frequently used functions at your fingertip with an easy-to-use app.

In conjunction with Daikin's BRP15B61 wireless LAN adaptor, the Airbase app lets you use your smartphone or tablet\* to operate your air conditioning unit via your in-home Wi-Fi or remotely with an internet connection.

Up to 10 systems\*\* can be conveniently monitored and controlled on the app anywhere, anytime.



### Features

| FUNCTION                           | DUCTED/BULKHEAD WITH NAV EASE | DUCTED WITH ON/OFF ZONE CONTROL | DUCTED WITH LINEAR ZONE CONTROL |
|------------------------------------|-------------------------------|---------------------------------|---------------------------------|
| Start/stop operation               | ✓                             | ✓                               | ✓                               |
| Temperature setting                | ✓                             | ✓                               | ✓                               |
| Fan speed settings                 | ✓                             | ✓                               | ✗                               |
| Mode selection (cool/heat/fan/dry) | ✓                             | ✓                               | ✓                               |
| Zone on/off                        | ✗                             | ✓                               | ✓                               |
| Zone Temperature (±2°C)            | ✗                             | ✗                               | ✓                               |
| 24 hour on/off timer               | ✓                             | ✓                               | ✓                               |
| Enter zone names                   | ✗                             | ✓                               | ✓                               |
| Error notification                 | ✓                             | ✓                               | ✓                               |
| Room temperature display           | ✓                             | ✓                               | ✓                               |
| Filter clean reminder              | ✓                             | ✓                               | ✓                               |
| Push notification (on/off alerts)  | ✓                             | ✓                               | ✓                               |
| Automatic adaptor firmware update  | ✓                             | ✓                               | ✓                               |
| Setup Wizard in app                | ✓                             | ✓                               | ✓                               |

## Three ways to connect

### 1. Direct connection


For locations without a Wi-Fi network, the app can wirelessly connect directly to a WLAN adaptor equipped air conditioner, when in range.

### 2. Wi-Fi connection

A WLAN adaptor equipped air conditioner can easily be joined to a local Wi-Fi network. Once connected, the system can be controlled from any networked Android or iOS device.

### 3. Internet connection

Monitor and control your system from virtually anywhere, adjusting temperature and setting for a comfortable environment ready for when you arrive home. With no subscription costs from Daikin, all you need is a permanent internet connection for your Wi-Fi network, and an internet connection for your phone or tablet.

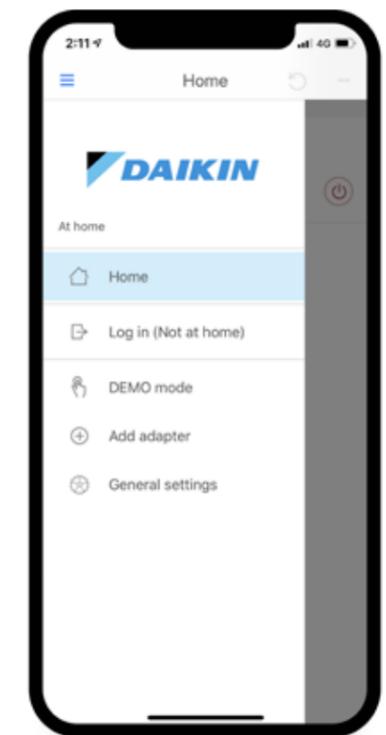

\*Only compatible with Android (≥ 5.0) & iOS (≥ 8.0) devices and in portrait orientation only

\*\*Each ducted system requires a BRP15B61 adaptor & must be connected on the same Wi-Fi network

# Features checklist

|   | PREMIUM INVERTER (71-200 CLASS)  | PREMIUM INVERTER (250 CLASS) | HEATING FOCUS (180-250 CLASS)             | SLIMLINE   | BULKHEAD   | INVERTER (50-160 CLASS)  | INVERTER (180-250 CLASS)                     |
|---|--|------------------------------|---|--|--|--|--|
|   | FDYA71AV19<br>FDYA85AV19<br>FDYA100AV19<br>FDYA125AV19<br>FDYA140AV19<br>FDYA160AV19<br>FDYA180AV1<br>FDYA200AV1 | FDYQ250LCV1                  | FDYQ180LCV1<br>FDYQ200LCV1<br>FDYQ250LCV1 | FBA50BAVMA<br>FBA60BAVMA<br>FBA71BVMA<br>FBA85BVMA<br>FBA100BVMA<br>FBA125BVMA<br>FBA140BVMA | FDYBA25AV1<br>FDYBA35AV1<br>FDYBA50AV1<br>FDYBA60AV1<br>FDYBA71AV1 | FDYAN50AV1<br>FDYAN60AV1<br>FDYAN71AV1<br>FDYAN85AV1<br>FDYAN100AV1<br>FDYAN125AV1<br>FDYAN140AV1<br>FDYAN160AV1 | FDYQN180LCV1<br>FDYQN200LCV1<br>FDYQN250LBV1 |
| Inverter Operation                                | ✓  | ✓                            | ✓   | ✓  | ✓  | ✓  | ✓  |
| DC Indoor Fan Motor                               | ✓  | ✓                            | ✓   | ✓  | ✓  | ✓  | ✓  |
| Swing Compressor                                  | ✓  |                              |   | ✓  | ✓  | ✓  |  |
| Scroll Compressor                                 |  | ✓                            | ✓   |  |  |  | ✓  |
| High Efficiency Indoor Heat Exchanger Coil        | ✓  | ✓                            | ✓   | ✓  | ✓  | ✓  | ✓  |
| Automatic Mode Changeover                         | ✓  | ✓                            | ✓   | ✓  | ✓  | ✓  | ✓  |
| P.M.V. Control Operations                         | ✓  | ✓                            | ✓   | ✓  |  | ✓  | ✓  |
| Temperature Limit Operations                      | ✓ <sup>1</sup>   | ✓ <sup>1</sup>               | ✓ <sup>1</sup>                            | ✓ <sup>1</sup>   | ✓ <sup>1</sup>   | ✓ <sup>1</sup>   | ✓ <sup>1</sup>                               |
| Home Leave  | ✓ <sup>1</sup>   | ✓ <sup>1</sup>               | ✓ <sup>1</sup>                            | ✓ <sup>1</sup>   | ✓ <sup>1</sup>   | ✓ <sup>1</sup>   | ✓ <sup>1</sup>                               |
| Auto Restart After Power Failure                  | ✓  | ✓                            | ✓   | ✓  | ✓  | ✓  | ✓  |
| Self Diagnostics                                  | ✓  | ✓                            | ✓   | ✓  | ✓  | ✓  | ✓  |
| Anti-Corrosion Coating for Outdoor Heat Exchanger | ✓  | ✓                            | ✓   | ✓  | ✓  | ✓  | ✓  |
| Indoor Unit Designed and Built in Australia       | ✓  | ✓                            | ✓   |  | ✓  | ✓  | ✓  |
| Long Piping Length                                | ✓  | ✓                            | ✓   | ✓  |  | ✓  | ✓  |
| High Strength Galvanized Steel Casing             | ✓  | ✓                            | ✓   | ✓  | ✓  | ✓  | ✓  |
| Night Quiet Mode                                  | ✓ <sup>2</sup>   | ✓ <sup>2</sup>               | ✓ <sup>2</sup>                            | ✓ <sup>2</sup>   | ✓ <sup>2</sup>   | ✓ <sup>2</sup>   | ✓ <sup>2</sup>                               |
| Low Noise Operation                               | ✓ <sup>3</sup>   | ✓ <sup>3</sup>               | ✓ <sup>3</sup>                            | ✓  | ✓  | ✓  | ✓ <sup>3</sup>                               |
| Program Dry Mode                                  | ✓  | ✓                            | ✓   | ✓  | ✓  | ✓  | ✓  |
| Intelligent Defrost                               | ✓  | ✓                            | ✓   | ✓  | ✓  | ✓  | ✓  |
| Hot Start   | ✓  | ✓                            | ✓   | ✓  | ✓  | ✓  | ✓  |
| Quick Cool / Heat – Powerful Mode                 | ✓  | ✓                            | ✓   | ✓  | ✓  | ✓  | ✓  |
| Automatic Fan Speed                               |  |                              |   |  | ✓  |  |  |
| Automatic Airflow Adjustment                      | ✓  | ✓                            | ✓   | ✓  |  | ✓  | ✓ <sup>4</sup>                               |
| Indoor Fan Cycles with Compressor                 | ✓ <sup>5</sup>   | ✓ <sup>5</sup>               | ✓ <sup>5</sup>                            | ✓ <sup>5</sup>   | ✓ <sup>5</sup>   | ✓ <sup>5</sup>   | ✓ <sup>5</sup>                               |
| 24 Hour On/Off Timer                              | ✓  | ✓                            | ✓   | ✓  | ✓  | ✓  | ✓  |
| Seven Day Time Clock                              | ✓  | ✓                            | ✓   | ✓  | ✓ <sup>1</sup>   | ✓  | ✓  |
| Electronic Control System                         | ✓  | ✓                            | ✓   | ✓  | ✓  | ✓  | ✓  |
| Airside Control                                   | ✓ <sup>6</sup>   | ✓ <sup>6</sup>               | ✓ <sup>6</sup>                            |  |  | ✓ <sup>6</sup>   |  |
| OptiZone Control                                  | ✓ <sup>7</sup>   |                              |   |  |  | ✓ <sup>7</sup>   |  |
| Wireless LAN Connection                           | ✓ <sup>8</sup>   | ✓ <sup>8</sup>               | ✓ <sup>8</sup>                            | ✓ <sup>8</sup>   | ✓ <sup>10</sup>  | ✓ <sup>8</sup>   | ✓ <sup>8</sup>                               |
| R22 Retrofit Capability                           | ✓ <sup>9</sup>   | ✓                            |   | ✓  |  | ✓  |  |
| Auto Clean Air Filter Module                      |  |                              |   |  | ✓ <sup>10</sup>  |  |  |
| 3-D Auto Swing Grille                             |  |                              |   |  | ✓ <sup>10</sup>  |  |  |
| Demand Enabled Response (DRED) <sup>11</sup>      | ✓ <sup>3</sup>   | ✓ <sup>3</sup>               | ✓ <sup>3</sup>                            | ✓  | ✓  | ✓  | ✓ <sup>3</sup>                               |

<sup>1</sup> Only available on Nav Ease

<sup>2</sup> Night Quiet modes may reduce capacity

<sup>3</sup> Optional accessory required for FDYA180-200AV1, FDYQ200-250LCV1 & FDYQN200-250LB(C)V1

<sup>4</sup> Only available on FDYQN180-200LCV1

<sup>5</sup> Can be set up by installer during installation

<sup>6</sup> Only available on AirHub On/Off Zone Controller & Zone Controller

<sup>7</sup> Only available on AirHub Linear Controller

<sup>8</sup> Optional accessory & only compatible with Nav Ease or Zone Controller

<sup>9</sup> Not available for FDYA180-200AV1

<sup>10</sup> Optional accessory & only compatible with Nav Ease Controller

<sup>11</sup> Compliant to AS/NZS 4755.3.1:2012

# Features and benefits

## Energy efficiency

### Inverter operation

An inverter system works like the accelerator of a car, gently increasing or decreasing power to steadily maintain your optimum temperature without fluctuations. That means uninterrupted comfort and significant savings on running costs. Daikin Premium Inverters can also reach your desired temperature faster than conventional air conditioners.

### Automatic mode changeover

Automatically selects heating or cooling modes to suit thermostat settings and prevailing room temperature.

### Predicted Mean Vote (PMV) Control

Measures indoor and outdoor temperatures to calculate the ideal room temperature, gently adjusting it for the optimum balance between efficiency and comfort.

### Temperature limit operations

Lets you pre-define temperature range for cooling or heating, to reduce energy consumption.

### Home Leave

Ideal for cold climates, Home Leave turns your air conditioner on automatically when room temperatures drop below 10°C, keeping your home at or above 10°C so it never gets really cold.

## Automatic functions

### Auto restart after power failure

The air conditioner memorises the settings for mode, airflow, temperature etc. and automatically returns to them when power is restored after a power failure.

### Self diagnosis with digital display

Malfunction codes are displayed on your control panel for fast, easy fault diagnosis and maintenance.

### Anti-corrosion coating

An anti-corrosion coating on outdoor heat exchangers gives greater resistance to salt damage and atmospheric corrosion.

### Compact design

The compact design of Daikin ducted indoor units allows them to be installed in confined areas, and they can also be dismantled for easier installation in tight roof spaces.

## Comfort control

### Night Quiet Mode

Outdoor unit noise is automatically reduced by 3dB when outdoor temperatures fall more than 6°C from the day's maximum (set during installation).

### Program Dry Mode

In this mode, priority is given to reducing the level of humidity in the room rather than room temperature.

### Intelligent Defrost

During heating operation in low ambient temperature conditions, frost can form on the outdoor unit heat exchanger which can reduce your air conditioner's performance. Daikin's Intelligent Defrost system constantly monitors a range of system parameters and temperatures to determine the optimum time to commence a defrost operation for maximum performance in cold conditions.

### Hot start

Prior to heating, the indoor unit warms to a pre-set temperature before the fan switches on, ensuring only warm air is discharged, eliminating cold drafts.

### Quick cool/heat - Powerful Mode

This feature temporarily increases power to more rapidly reach your desired room temperature, before automatically returning to normal operation.

## Timer control

### 24 hour on/off timer

This timer can be pre-set to start and stop at any time within a 24 hour period.

### Seven day time clock

This allows you to program your air conditioner to turn on or off at set times for every day of the week.

## Premium Inverter - Single Phase



| INDOOR UNIT                   |                    | FDYA71AV19                     | FDYA85AV19     | FDYA100AV19    | FDYA125AV19    | FDYA140AV19    | FDYA160AV19      | FDYA180AV1                   |    |
|-------------------------------|--------------------|--------------------------------|----------------|----------------|----------------|----------------|------------------|------------------------------|----|
| OUTDOOR UNIT                  |                    | RZAS71C2V1                     | RZAS85C2V1     | RZAS100C2V1    | RZAS125C2V1    | RZAS140C2V1    | RZAS160C2V1      | RZAS180DV1                   |    |
| Rated Capacity                | Cool (kW)          | 7.1                            | 8.5            | 10.0           | 12.5           | 14.0           | 16.0             | 18.0                         |    |
|                               | Heat (kW)          | 7.5                            | 10.0           | 12.5           | 15.0           | 16.5           | 18.0             | 20.0                         |    |
| Capacity Range                | Cool (kW)          | 3.2-8.0                        | 3.7-10.0       | 5.0-11.2       | 5.0-14.0       | 5.0-16.0       | 7.3-17.0         | 9.0-20.0                     |    |
|                               | Heat (kW)          | 2.2-9.0                        | 3.0-11.2       | 5.1-14.0       | 4.1-16.0       | 6.7-18.0       | 7.0-20.0         | 10.0-22.4                    |    |
| Power Input (Rated)           | Cool (kW)          | 1.90                           | 2.35           | 2.61           | 3.45           | 3.93           | 4.85             | 5.16                         |    |
|                               | Heat (kW)          | 1.75                           | 2.46           | 3.13           | 3.80           | 4.28           | 4.65             | 4.79                         |    |
| E.E.R./C.O.P                  | C/H                | 3.74/4.29                      | 3.62/4.07      | 3.83/3.99      | 3.62/3.95      | 3.56/3.86      | 3.30/3.87        | 3.49/4.18                    |    |
| TCSPF (Residential)           | Hot/Average/Cold   | 5.20/4.50/4.55                 | 4.99/4.40/4.45 | 4.69/4.22/4.25 | 4.96/4.47/4.59 | 5.00/4.54/4.67 | 4.77/4.37/4.55   | 5.17/4.41/4.42               |    |
| HSPF (Residential)            | Hot/Average/Cold   | 4.79/4.34/3.86                 | 4.43/4.04/3.60 | 4.43/4.07/3.62 | 4.72/4.08/3.45 | 5.01/4.12/3.41 | 4.55/3.97/3.41   | 5.33/4.52/3.82               |    |
| Airflow Rate (Nominal/Max)    | l/s                | 425/566                        | 580/600        | 680/800        | 755/840        | 900/1000       | 950/1120         | 1160/1200                    |    |
| Indoor Sound Level (H) @ 1.5m | dBA (C/H)          | 37.3/40.5                      | 42.0/42.5      | 42.3/45.0      | 44.8/46.2      | 45.9/47.4      | 47.2/49.6        | 42.1/42.1                    |    |
| Piping Length                 | m                  | 75                             |                |                |                |                |                  |                              | 50 |
| Indoor Fan Speeds             |                    | H/M/L                          |                |                |                |                |                  |                              |    |
| Dimensions (HxWxD)            | Indoor (mm)        | 300x1210x900                   |                |                | 360x1520x935   | 400x1505x980   |                  | 470x1200x997                 |    |
|                               | Outdoor (mm)       | 990x940x320                    |                | 1430x940x320   |                |                |                  |                              |    |
| Weight                        | Indoor (kg)        | 40                             | 41             | 46             | 56             | 60             | 60               | 70                           |    |
|                               | Outdoor (kg)       | 69                             | 78             | 93             | 93             | 93             | 99               | 118                          |    |
| Power Supply                  | V/Hz               | 1 Phase, 220-240V, 50Hz        |                |                |                |                |                  |                              |    |
| Compressor Type               |                    | Hermetically Sealed Swing Type |                |                |                |                |                  |                              |    |
| Refrigerant                   |                    | R32                            |                |                |                |                |                  |                              |    |
| Pipe Sizes                    | Liquid (mm)        | 9.5 (Flared)                   |                |                |                |                |                  | 9.5 (Brazed)                 |    |
|                               | Gas (mm)           | 15.9 (Flared)                  |                |                |                |                |                  | 19.1 (Brazed)                |    |
|                               | Drain (mm)         | ID 25 / OD 32                  |                |                |                |                |                  | BSP 3/4 inch Internal Thread |    |
| Supply Air Opening            | mm (HxW, Flange)   | 185x852                        |                | 245x1152       | 295x1152       |                | 350x918          |                              |    |
| Return Air Opening            | mm                 | 1x400 (Oval)                   |                | 2x350 (Oval)   | 2x400 (Oval)   |                | 393x918 (Flange) |                              |    |
| Outdoor Operating Range       | Cool (°CDB)        | -5 to 50                       |                |                |                |                |                  | -5 to 52                     |    |
|                               | Heat (°CWB)        | -15 to 15.5                    |                |                |                |                |                  | -20 to 15.5                  |    |
| EPA Sound Power Level         | dBA                | 67                             | 71             | 70             | 71             | 73             | 75               | 82                           |    |
| Outdoor Sound Level (H) @ 1m  | Pressure dBA (C/H) | 48/50                          | 52/53          | 51/53          | 52/54          | 54/56          | 56/58            | 59/61                        |    |

Notes:

- i. The Rated Capacity, Power Input and Running Current are measured in accordance with AS/NZS 3823.1.2  
Cooling: Indoor temp: 27°CDB/19°CWB, Outdoor temp: 35°CDB/24°CWB  
Heating: Indoor temp: 20°CDB/15°CWB, Outdoor temp: 7°CDB/6°CWB
- ii. Indoor and outdoor sound levels are determined in an anechoic chamber and may differ once the unit is installed due to ambient conditions
- iii. TCSPF: Total Cooling Seasonal Performance Factor & HSPF: Heating Seasonal Performance Factor as defined under GEMS 2019 Determination
- iv. R32 ducted indoor units must be installed in the ceiling space, it is not to be installed under floor

## Premium Inverter - Three Phase



| INDOOR UNIT                   |                    | FDYA180AV1                     | FDYA200AV1        | FDYQ250LCV1    | HEATING FOCUS OPTION            |                   |                |
|-------------------------------|--------------------|--------------------------------|-------------------|----------------|---------------------------------|-------------------|----------------|
| OUTDOOR UNIT                  |                    | RZAS180DY1                     | RZAS200DY1        | RZYQ10TY1      | RZYQ7TA2Y1                      | RZYQ8TA1Y1        | RZYQ10TA1Y1    |
| Rated Capacity                | Cool (kW)          | 18.0                           | 20.0              | 24.0           | 18.0                            | 20.0              | 24.0           |
|                               | Heat (kW)          | 20.0                           | 22.4              | 26.8           | 20.0                            | 22.4              | 26.8           |
| Capacity Range                | Cool (kW)          | 9.0-20.0                       | 10.0-22.4         | 11.7-24.0      | 9.0-20.0                        | 10.0-22.4         | 11.7-24.0      |
|                               | Heat (kW)          | 10.0-22.4                      | 11.2-25.0         | 13.4-26.8      | 10.0-22.4                       | 11.2-25.0         | 13.4-26.8      |
| Power Input (Rated)           | Cool (kW)          | 5.09                           | 5.94              | 7.47           | 5.60                            | 6.08              | 7.47           |
|                               | Heat (kW)          | 4.85                           | 5.80              | 8.14           | 5.81                            | 6.17              | 8.14           |
| E.E.R./C.O.P                  | C/H                | 3.54/4.12                      | 3.37/3.86         | 3.21/3.29      | 3.21/3.44                       | 3.29/3.63         | 3.21/3.29      |
| TCSPF (Residential)           | Hot/Average/Cold   | 5.20/4.41/4.42                 | 5.11/4.40/4.43    | 3.98/3.50/3.51 | 3.79/3.23/3.18                  | 3.86/3.32/3.29    | 3.97/3.48/3.48 |
| HSPF (Residential)            | Hot/Average/Cold   | 5.22/4.47/3.82                 | 5.23/4.32/3.64    | 3.60/3.37/3.15 | 3.21/3.15/3.02                  | 3.42/3.35/3.20    | 3.60/3.37/3.15 |
| Airflow Rate (Nominal/Max)    | l/s                | 1160/1200                      | 1200/1300         | 1400/1600      | 1160/1200                       | 1200/1300         | 1400/1600      |
| Indoor Sound Level (H) @ 1.5m | dBA (C/H)          | 42.1/42.1                      | 39.7/39.7         | 46.0/46.0      | 45.0/45.0                       | 44.0/44.0         | 46.0/46.0      |
| Piping Length                 | m                  | 50                             |                   | 150            | 165                             |                   |                |
| Indoor Fan Speeds             |                    | H/M/L                          |                   |                |                                 |                   |                |
| Dimensions (HxWxD)            | Indoor (mm)        | 470x1200x997                   | 470x1400x997      |                | 470x1200x997                    | 470x1400x997      |                |
|                               | Outdoor (mm)       | 1430x940x320                   |                   |                | 1657x930x765                    |                   |                |
| Weight                        | Indoor (kg)        | 70                             | 77                | 85             | 70                              | 79                | 85             |
|                               | Outdoor (kg)       | 118                            | 118               | 203            | 185                             | 185               | 200            |
| Power Supply                  | V/Hz               | 3 Phase, 380-415V, 50Hz        |                   |                |                                 |                   |                |
| Compressor Type               |                    | Hermetically Sealed Swing Type |                   |                | Hermetically Sealed Scroll Type |                   |                |
| Refrigerant                   |                    | R32                            |                   |                | R410A                           |                   |                |
| Pipe Sizes                    | Liquid (mm)        | 9.5 (Brazed)                   |                   |                |                                 |                   |                |
|                               | Gas (mm)           | 19.1 (Brazed)                  |                   | 22.2 (Brazed)  | 19.1 (Brazed)                   |                   | 22.2 (Brazed)  |
|                               | Drain (mm)         | BSP 3/4 inch Internal Thread   |                   |                |                                 |                   |                |
| Supply Air Opening            | mm (HxW, Flange)   | 350x918                        | 350x1118          |                | 350x918                         | 350x1118          |                |
| Return Air Opening            | mm                 | 393x918 (Flange)               | 393x1118 (Flange) |                | 393x918 (Flange)                | 393x1118 (Flange) |                |
| Outdoor Operating Range       | Cool (°CDB)        | -5 to 52                       |                   |                | -5 to 49                        |                   |                |
|                               | Heat (°CWB)        | -20 to 15.5                    |                   |                |                                 |                   |                |
| EPA Sound Power Level         | dBA                | 82                             | 82                | -              | 76                              | 76                | 78             |
| Outdoor Sound Level (H) @ 1m  | Pressure dBA (C/H) | 59/61                          | 59/61             | 57/57          | 56/56                           | 56/56             | 57/57          |

Notes:

- i. The Rated Capacity, Power Input and Running Current are measured in accordance with AS/NZS 3823.1.2  
Cooling: Indoor temp: 27°CDB/19°CWB, Outdoor temp: 35°CDB/24°CWB  
Heating: Indoor temp: 20°CDB/15°CWB, Outdoor temp: 7°CDB/6°CWB
- ii. Indoor and outdoor sound levels are determined in an anechoic chamber and may differ once the unit is installed due to ambient conditions
- iii. TCSPF: Total Cooling Seasonal Performance Factor & HSPF: Heating Seasonal Performance Factor as defined under GEMS 2019 Determination
- iv. FDYA180-200AV1/RZAS180-200DY1 have optional R32 Safety Measures to comply with AS/NZS 60335.2.40 under certain conditions, please refer to the installation manual for further details.

Product Specification  
Inverter - Single Phase



| INDOOR UNIT                  |                    | FDYAN50AV1                     | FDYAN60AV1     | FDYAN71AV1     | FDYAN85AV1     | FDYAN100AV1    | FDYAN125AV1    | FDYAN140AV1    | FDYAN160AV1    |
|------------------------------|--------------------|--------------------------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|
| OUTDOOR UNIT                 |                    | RZA50C2V1                      | RZA60C2V1      | RZA71C2V1      | RZA85C2V1      | RZA100C2V1     | RZA125C2V1     | RZA140C2V1     | RZA160C2V1     |
| Rated Capacity               | Cool (kW)          | 5.0                            | 6.0            | 7.1            | 8.5            | 10.0           | 12.5           | 14.0           | 15.5           |
|                              | Heat (kW)          | 6.0                            | 7.0            | 7.5            | 10.0           | 12.5           | 15.0           | 16.5           | 18.0           |
| Capacity Range               | Cool (kW)          | 1.4-6.0                        | 1.4-7.1        | 1.8-8.0        | 3.2-10.0       | 3.2-11.2       | 4.0-14.0       | 5.0-16.0       | 7.3-16.3       |
|                              | Heat (kW)          | 1.4-7.1                        | 1.4-8.0        | 2.0-9.0        | 3.5-11.2       | 3.5-14.0       | 4.1-16.0       | 5.1-18.0       | 7.3-18.2       |
| Power Input (Rated)          | Cool (kW)          | 1.35                           | 1.78           | 2.20           | 2.53           | 3.10           | 3.94           | 4.30           | 4.95           |
|                              | Heat (kW)          | 1.62                           | 1.95           | 1.93           | 2.80           | 3.35           | 4.00           | 4.50           | 4.90           |
| E.E.R./C.O.P                 | C/H                | 3.70/3.70                      | 3.37/3.59      | 3.23/3.89      | 3.36/3.57      | 3.23/3.73      | 3.17/3.75      | 3.26/3.67      | 3.13/3.67      |
| TCSPF (Residential)          | Hot/Average/Cold   | 4.42/3.72/3.65                 | 4.35/3.75/3.75 | 4.42/3.86/3.92 | 4.28/3.84/3.89 | 4.28/3.87/3.96 | 4.25/3.90/4.01 | 4.19/3.86/3.96 | 4.05/3.76/3.86 |
| HSPF (Residential)           | Hot/Average/Cold   | 4.51/4.02/3.49                 | 4.46/3.76/3.15 | 4.17/3.85/3.41 | 3.97/3.67/3.32 | 3.85/3.48/3.04 | 4.31/3.31/2.77 | 3.90/3.51/3.05 | 3.87/3.53/3.12 |
| Airflow Rate (Nominal/Max)   | l/s                | 315/370                        | 340/400        | 425/566        | 580/600        | 680/800        | 755/840        | 900/1000       | 950/1120       |
| Indoor Sound Level (H) @1.5m | dBA (C/H)          | 33.3/35.0                      | 34.1/35.9      | 37.3/40.5      | 42.0/42.4      | 43.5/45.8      | 44.2/45.5      | 46.6/47.9      | 47.9/50.7      |
| Piping Length                | m                  | 50                             |                |                |                |                |                |                |                |
| Indoor Fan Speeds            |                    | H/M/L                          |                |                |                |                |                |                |                |
| Dimensions (HxWxD)           | Indoor (mm)        | 300x1210x900                   |                |                |                | 360x1520x935   |                |                |                |
|                              | Outdoor (mm)       | 595x845x300                    |                | 990x940x320    |                | 1430x940x320   |                | 1680x930x765   |                |
| Weight                       | Indoor (kg)        | 37                             | 37             | 40             | 40             | 45             | 55             | 55             | 56             |
|                              | Outdoor (kg)       | 45                             | 45             | 45             | 69             | 69             | 78             | 93             | 99             |
| Power Supply                 | V/Hz               | 1 Phase, 220-240V, 50Hz        |                |                |                |                |                |                |                |
| Compressor Type              |                    | Hermetically Sealed Swing Type |                |                |                |                |                |                |                |
| Refrigerant                  |                    | R32                            |                |                |                |                |                |                |                |
| Pipe Sizes                   | Liquid (mm)        | 6.4 (Flare)                    |                |                | 9.5 (Flare)    |                |                |                |                |
|                              | Gas (mm)           | 12.7 (Flare)                   |                |                | 15.9 (Flare)   |                |                |                |                |
|                              | Drain (mm)         | ID 25 / OD 32                  |                |                |                |                |                |                |                |
| Supply Air Opening           | mm (HxW, Flange)   | 185x852                        |                |                |                | 245x1152       |                |                |                |
| Return Air Opening           | mm                 | 1x400 (Oval)                   |                |                | 2x350 (Oval)   |                | 2x400 (Oval)   |                |                |
| Outdoor Operating Range      | Cool (°CDB)        | -5 to 46                       |                |                |                |                |                |                |                |
|                              | Heat (°CWB)        | -15 to 15.5                    |                |                |                |                |                |                |                |
| EPA Sound Power Level        | dBA                | 68                             | 68             | 68             | 70             | 71             | 72             | 73             | 75             |
| Outdoor Sound Level (H) @1m  | Pressure dBA (C/H) | 48/51                          | 48/51          | 48/51          | 51/54          | 52/54          | 53/56          | 54/56          | 56/58          |

Notes:

- i. The Rated Capacity, Power Input and Running Current are measured in accordance with AS/NZS 3823.1.2  
Cooling: Indoor temp: 27°CDB/19°CWB, Outdoor temp: 35°CDB/24°CWB  
Heating: Indoor temp: 20°CDB/15°CWB, Outdoor temp: 7°CDB/6°CWB
- ii. Indoor and outdoor sound levels are determined in an anechoic chamber and may differ once the unit is installed due to ambient conditions
- iii. TCSPF: Total Cooling Seasonal Performance Factor & HSPF: Heating Seasonal Performance Factor as defined under GEMS 2019 Determination
- iv. R32 ducted indoor units must be installed in the ceiling space, it is not to be installed under floor

Product Specification  
Inverter - Three Phase



| INDOOR UNIT                  |                    | FDYAN71AV1                     | FDYAN85AV1     | FDYAN100AV1    | FDYAN125AV1    | FDYAN140AV1    | FDYAN160AV1    | FDYQN180LCV1                    | FDYQN200LCV1      | FDYQN250LBV1      |              |
|------------------------------|--------------------|--------------------------------|----------------|----------------|----------------|----------------|----------------|---------------------------------|-------------------|-------------------|--------------|
| OUTDOOR UNIT                 |                    | RZA71C2Y1                      | RZA85C2Y1      | RZA100C2Y1     | RZA125C2Y1     | RZA140C2Y1     | RZA160C2Y1     | RZQ180M2Y1                      | RZQ200MY1         | RZQ250LY1         |              |
| Rated Capacity               | Cool (kW)          | 7.1                            | 8.5            | 10.0           | 12.5           | 14.0           | 15.5           | 18.0                            | 19.5              | 23.5              |              |
|                              | Heat (kW)          | 7.5                            | 10.0           | 12.5           | 15.0           | 16.5           | 18.0           | 20.0                            | 22.4              | 26.8              |              |
| Capacity Range               | Cool (kW)          | 3.2-8.0                        | 3.2-10.0       | 3.2-11.2       | 4.0-14.0       | 5.0-16.0       | 7.3-16.3       | 9.0-18.0                        | 10.1-19.5         | 15.0-23.5         |              |
|                              | Heat (kW)          | 3.5-9.0                        | 3.5-11.2       | 3.5-14.0       | 4.1-16.0       | 5.1-18.0       | 7.3-18.2       | 10.0-20.0                       | 11.2-22.4         | 16.8-26.8         |              |
| Power Input (Rated)          | Cool (kW)          | 2.20                           | 2.53           | 3.10           | 3.94           | 4.30           | 4.95           | 5.82                            | 6.11              | 7.85              |              |
|                              | Heat (kW)          | 1.93                           | 2.80           | 3.35           | 4.00           | 4.50           | 4.90           | 6.11                            | 6.85              | 8.47              |              |
| E.E.R./C.O.P                 | C/H                | 3.23/3.89                      | 3.36/3.57      | 3.23/3.73      | 3.17/3.75      | 3.26/3.67      | 3.13/3.67      | 3.09/3.27                       | 3.19/3.27         | 2.99/3.16         |              |
| TCSPF (Residential)          | Hot/Average/Cold   | 4.44/3.91/3.98                 | 4.28/3.84/3.89 | 4.28/3.87/3.96 | 4.25/3.90/4.01 | 4.19/3.86/3.96 | 4.05/3.76/3.86 | 3.61/3.15/3.12                  | 4.05/3.76/3.86    | 3.73/3.41/3.46    |              |
| HSPF (Residential)           | Hot/Average/Cold   | 4.17/3.90/3.55                 | 3.97/3.67/3.32 | 3.85/3.48/3.04 | 4.31/3.31/2.77 | 3.90/3.51/3.05 | 3.87/3.53/3.12 | 3.23/2.95/2.61                  | 3.87/3.53/3.12    | 3.41/3.08/2.72    |              |
| Airflow Rate (Nominal/Max)   | l/s                | 425/566                        | 580/600        | 680/800        | 755/840        | 900/1000       | 950/1120       | 1160/1200                       | 1400/1600         | 1400/1600         |              |
| Indoor Sound Level (H) @1.5m | dBA (C/H)          | 37.3/40.5                      | 42.0/42.4      | 43.5/45.8      | 44.2/45.5      | 46.6/47.9      | 47.9/50.7      | 45.0/45.0                       | 46.0/46.0         | 49.5/49.5         |              |
| Piping Length                | m                  | 50                             |                |                |                |                |                |                                 |                   |                   |              |
| Indoor Fan Speeds            |                    | H/M/L                          |                |                |                |                |                |                                 |                   |                   |              |
| Dimensions (HxWxD)           | Indoor (mm)        | 300x1210x900                   |                |                |                | 360x1520x935   |                |                                 | 470x1200x997      | 470x1400x997      | 500x1430x970 |
|                              | Outdoor (mm)       | 990x940x320                    |                |                |                |                |                | 1430x940x320                    |                   | 1680x930x765      |              |
| Weight                       | Indoor (kg)        | 40                             | 40             | 45             | 55             | 55             | 56             | 70                              | 85                | 92                |              |
|                              | Outdoor (kg)       | 69                             | 69             | 69             | 78             | 78             | 93             | 99                              | 138               | 193               |              |
| Power Supply                 | V/Hz               | 3 Phase, 380-415V, 50Hz        |                |                |                |                |                |                                 |                   |                   |              |
| Compressor Type              |                    | Hermetically Sealed Swing Type |                |                |                |                |                | Hermetically Sealed Scroll Type |                   |                   |              |
| Refrigerant                  |                    | R32                            |                |                |                |                |                | R410A                           |                   |                   |              |
| Pipe Sizes                   | Liquid (mm)        | 9.5 (Flare)                    |                |                |                |                |                | 9.5 (Brazed)                    |                   |                   |              |
|                              | Gas (mm)           | 15.9 (Flare)                   |                |                |                |                |                | 19.1 (Brazed)                   |                   | 22.2 (Brazed)     |              |
|                              | Drain (mm)         | ID 25/OD 32                    |                |                |                |                |                | BSP 3/4 inch Internal Thread    |                   |                   |              |
| Supply Air Opening           | mm (HxW, Flange)   | 185x852                        |                |                | 245x1152       |                |                | 350x918                         | 350x1118          | 376x938           |              |
| Return Air Opening           | mm                 | 1x400 (Oval)                   |                | 2x350 (Oval)   |                | 2x400 (Oval)   |                | 393x918 (Flange)                | 393x1118 (Flange) | 350x1118 (Flange) |              |
| Outdoor Operating Range      | Cool (°CDB)        | -5 to 46                       |                |                |                |                |                |                                 | -5 to 43          |                   |              |
|                              | Heat (°CWB)        | -15 to 15.5                    |                |                |                |                |                |                                 | -20 to 15.5       |                   |              |
| EPA Sound Power Level        | dBA                | 67                             | 70             | 71             | 72             | 73             | 75             | 72                              | 74                | 79                |              |
| Outdoor Sound Level (H) @1m  | Pressure dBA (C/H) | 48/50                          | 51/54          | 52/54          | 53/56          | 54/56          | 56/58          | 57/58                           | 58/59             | 57/58             |              |

Notes:

- i. The Rated Capacity, Power Input and Running Current are measured in accordance with AS/NZS 3823.1.2  
Cooling: Indoor temp: 27°CDB/19°CWB, Outdoor temp: 35°CDB/24°CWB  
Heating: Indoor temp: 20°CDB/15°CWB, Outdoor temp: 7°CDB/6°CWB
- ii. Indoor and outdoor sound levels are determined in an anechoic chamber and may differ once the unit is installed due to ambient conditions
- iii. TCSPF: Total Cooling Seasonal Performance Factor & HSPF: Heating Seasonal Performance Factor as defined under GEMS 2019 Determination
- iv. R32 ducted indoor units must be installed in the ceiling space, it is not to be installed under floor

Product Specification  
FBA - Single Phase



| SERIES                       |                    | PREMIUM INVERTER               |                |                |                |                |                | INVERTER       |                |                |  |
|------------------------------|--------------------|--------------------------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|--|
| INDOOR UNIT                  |                    | FBA50BAVMA                     | FBA60BAVMA     | FBA71BVMA      | FBA85BVMA      | FBA100BVMA     | FBA125BVMA     | FBA140BVMA     | FBA71BVMA      | FBA85BVMA      |  |
| OUTDOOR UNIT                 |                    | RZAV50C2V1                     | RZAV60C2V1     | RZAV71C2V1     | RZAV85C2V1     | RZAV100F2V1    | RZAV125F2V1    | RZAV140F2V1    | RZAC71C2V1     | RZAC85C2V1     |  |
| Rated Capacity               | Cool (kW)          | 5.0                            | 6.0            | 7.1            | 8.5            | 10.0           | 12.5           | 14.0           | 7.1            | 8.5            |  |
|                              | Heat (kW)          | 6.0                            | 7.1            | 8.0            | 10.0           | 12.0           | 15.0           | 16.5           | 8.0            | 10.0           |  |
| Capacity Range               | Cool (kW)          | 1.4-6.0                        | 1.4-7.1        | 3.2-8.0        | 4.0-10.0       | 3.5-11.5       | 3.5-14.0       | 3.5-15.0       | 1.8-8.0        | 3.2-10.0       |  |
|                              | Heat (kW)          | 1.4-7.1                        | 1.4-8.0        | 3.5-9.0        | 4.1-11.2       | 3.5-14.0       | 3.5-16.5       | 3.5-18.0       | 2.0-9.0        | 3.5-11.2       |  |
| Power Input (Rated)          | Cool (kW)          | 1.37                           | 1.67           | 2.02           | 2.30           | 2.79           | 3.68           | 4.28           | 2.15           | 2.64           |  |
|                              | Heat (kW)          | 1.41                           | 1.71           | 1.99           | 2.50           | 2.92           | 3.88           | 4.52           | 2.30           | 2.95           |  |
| E.E.R./C.O.P                 | C/H                | 3.65/4.26                      | 3.59/4.15      | 3.51/4.02      | 3.70/4.00      | 3.58/4.11      | 3.40/3.87      | 3.27/3.65      | 3.30/3.48      | 3.22/3.39      |  |
| TCSPF (Residential)          | Hot/Average/Cold   | 4.63/3.87/3.83                 | 4.58/3.92/3.91 | 4.52/3.97/4.00 | 4.79/4.26/4.31 | 5.55/4.92/5.07 | 5.03/4.62/4.76 | 4.90/4.53/4.69 | 4.18/3.67/3.69 | 4.32/3.87/3.95 |  |
| HSPF (Residential)           | Hot/Average/Cold   | 5.01/4.57/4.11                 | 4.94/4.47/3.96 | 4.49/4.14/3.71 | 4.64/4.27/3.87 | 5.57/4.75/4.18 | 5.32/4.49/3.88 | 5.24/4.35/3.77 | 3.96/3.68/3.42 | 4.24/3.83/3.49 |  |
| Airflow Rate (Nominal)       | l/s                | 300                            | 300            | 383            | 533            | 533            | 600            | 600            | 383            | 533            |  |
| Indoor Sound Level (H) @1.5m | dBA                | 35                             | 35             | 38             | 38             | 38             | 40             | 40             | 38             | 38             |  |
| Piping Length                | m                  | 50                             |                | 75             |                | 85             |                | 50             |                |                |  |
| Indoor Fan Speeds            |                    | H/M/L                          |                |                |                |                |                |                |                |                |  |
| Dimensions (HxWxD)           | Indoor (mm)        | 245x1000x800                   |                |                | 245x1400x800   |                |                |                | 245x1000x800   | 245x1400x800   |  |
|                              | Outdoor (mm)       | 595x845x300                    |                | 990x940x320    |                | 870x1100x460   |                | 595x845x300    | 990x940x320    |                |  |
| Weight                       | Indoor (kg)        | 37                             | 37             | 37             | 47             | 47             | 47             | 47             | 37             | 47             |  |
|                              | Outdoor (kg)       | 45                             | 45             | 69             | 78             | 93             | 95             | 95             | 45             | 69             |  |
| Power Supply                 | V/Hz               | 1 Phase, 220-240V, 50Hz        |                |                |                |                |                |                |                |                |  |
| Compressor Type              |                    | Hermetically Sealed Swing Type |                |                |                |                |                |                |                |                |  |
| Refrigerant                  |                    | R32                            |                |                |                |                |                |                |                |                |  |
| Pipe Sizes                   | Liquid (mm)        | 6.4 (Flared)                   |                |                | 9.5 (Flared)   |                |                |                |                |                |  |
|                              | Gas (mm)           | 12.7 (Flared)                  |                |                | 15.9 (Flared)  |                |                |                |                |                |  |
|                              | Drain (mm)         | ID 25 / OD 32                  |                |                |                |                |                |                |                |                |  |
| Supply Air Opening           | mm (HxW, Flange)   | 176x792                        |                |                | 176x1192       |                |                |                | 176x792        | 176x1192       |  |
| Return Air Opening           | mm (HxW, Flange)   | 208x952                        |                |                | 208x1352       |                |                |                | 208x952        | 208x1352       |  |
| Outdoor Operating Range      | Cool (°CDB)        | -5 to 50                       |                |                |                |                |                |                | -5 to 46       |                |  |
|                              | Heat (°CWB)        | -15 to 15.5                    |                |                |                |                |                |                |                |                |  |
| EPA Sound Power Level        | dBA                | 68                             | 68             | 67             | 71             | 68             | 69             | 70             | 68             | 70             |  |
| Outdoor Sound Level (H) @1m  | Pressure dBA (C/H) | 48/51                          | 48/51          | 48/50          | 52/53          | 49/50          | 50/51          | 52/53          | 48/51          | 51/54          |  |

Notes:

- i. The Rated Capacity, Power Input and Running Current are measured in accordance with AS/NZS 3823.1.2  
Cooling: Indoor temp: 27°CDB/19°CWB, Outdoor temp: 35°CDB/24°CWB  
Heating: Indoor temp: 20°CDB/15°CWB, Outdoor temp: 7°CDB/6°CWB
- ii. Indoor and outdoor sound levels are determined in an anechoic chamber and may differ once the unit is installed due to ambient conditions
- iii. TCSPF: Total Cooling Seasonal Performance Factor & HSPF: Heating Seasonal Performance Factor as defined under GEMS 2019 Determination
- iv. R32 ducted indoor units must be installed in the ceiling space, it is not to be installed under floor

Product Specification  
FBA - Three Phase



| SERIES                       |                    | PREMIUM INVERTER               |                |                |                |                | INVERTER       |              |
|------------------------------|--------------------|--------------------------------|----------------|----------------|----------------|----------------|----------------|--------------|
| INDOOR UNIT                  |                    | FBA71BVMA                      | FBA85BVMA      | FBA100BVMA     | FBA125BVMA     | FBA140BVMA     | FBA85BVMA      |              |
| OUTDOOR UNIT                 |                    | RZAV71C2Y1                     | RZAV85C2Y1     | RZAV100F2Y1    | RZAV125F2Y1    | RZAV140F2Y1    | RZAC85C2Y1     |              |
| Rated Capacity               | Cool (kW)          | 7.1                            | 8.5            | 10.0           | 12.5           | 14.0           | 8.5            |              |
|                              | Heat (kW)          | 8.0                            | 10.0           | 12.0           | 15.0           | 16.5           | 10.0           |              |
| Capacity Range               | Cool (kW)          | 3.2-8.0                        | 4.0-10.0       | 3.5-11.5       | 3.5-14.0       | 3.5-15.0       | 3.2-10.0       |              |
|                              | Heat (kW)          | 3.5-9.0                        | 4.1-11.2       | 3.5-14.0       | 3.5-16.5       | 3.5-18.0       | 3.5-11.2       |              |
| Power Input (Rated)          | Cool (kW)          | 2.02                           | 2.30           | 2.79           | 3.68           | 4.28           | 2.64           |              |
|                              | Heat (kW)          | 1.99                           | 2.50           | 2.92           | 3.88           | 4.52           | 2.95           |              |
| E.E.R./C.O.P                 | C/H                | 3.51/4.02                      | 3.70/4.00      | 3.58/4.11      | 3.40/3.87      | 3.27/3.65      | 3.22/3.39      |              |
| TCSPF (Residential)          | Hot/Average/Cold   | 4.52/3.97/4.00                 | 4.79/4.26/4.31 | 5.55/4.92/5.07 | 5.03/4.62/4.76 | 4.90/4.53/4.69 | 4.32/3.87/3.95 |              |
| HSPF (Residential)           | Hot/Average/Cold   | 4.49/4.14/3.71                 | 4.64/4.27/3.87 | 5.57/4.75/4.18 | 5.32/4.49/3.88 | 5.24/4.35/3.77 | 4.24/3.83/3.49 |              |
| Airflow Rate (Nominal)       | l/s                | 383                            | 533            | 533            | 600            | 600            | 533            |              |
| Indoor Sound Level (H) @1.5m | dBA                | 38                             | 38             | 38             | 40             | 40             | 38             |              |
| Piping Length                | m                  | 75                             |                | 85             |                |                | 50             |              |
| Indoor Fan Speeds            |                    | H/M/L                          |                |                |                |                |                |              |
| Dimensions (HxWxD)           | Indoor (mm)        | 245x1000x800                   | 245x1400x800   |                |                |                | 245x1000x800   | 245x1400x800 |
|                              | Outdoor (mm)       | 990x940x320                    |                | 870x1100x460   |                | 990x940x320    |                |              |
| Weight                       | Indoor (kg)        | 37                             | 47             | 47             | 47             | 47             | 47             |              |
|                              | Outdoor (kg)       | 69                             | 78             | 93             | 95             | 95             | 69             |              |
| Power Supply                 | V/Hz               | 3 Phase, 380-415V, 50Hz        |                |                |                |                |                |              |
| Compressor Type              |                    | Hermetically Sealed Swing Type |                |                |                |                |                |              |
| Refrigerant                  |                    | R32                            |                |                |                |                |                |              |
| Pipe Sizes                   | Liquid (mm)        | 9.5 (Flared)                   |                |                |                |                |                |              |
|                              | Gas (mm)           | 15.9 (Flared)                  |                |                |                |                |                |              |
|                              | Drain (mm)         | ID 25 / OD 32                  |                |                |                |                |                |              |
| Supply Air Opening           | mm (HxW, Flange)   | 176x792                        | 176x1192       |                |                |                | 176x1192       |              |
| Return Air Opening           | mm (HxW, Flange)   | 208x952                        | 208x1352       |                |                |                | 208x952        |              |
| Outdoor Operating Range      | Cool (°CDB)        | -5 to 50                       |                |                |                |                | -5 to 46       |              |
|                              | Heat (°CWB)        | -15 to 15.5                    |                |                |                |                |                |              |
| EPA Sound Power Level        | dBA                | 67                             | 71             | 68             | 69             | 70             | 70             |              |
| Outdoor Sound Level (H) @1m  | Pressure dBA (C/H) | 48/50                          | 52/53          | 49/50          | 50/51          | 52/53          | 51/54          |              |

Notes:

- i. The Rated Capacity, Power Input and Running Current are measured in accordance with AS/NZS 3823.1.2  
Cooling: Indoor temp: 27°CDB/19°CWB, Outdoor temp: 35°CDB/24°CWB  
Heating: Indoor temp: 20°CDB/15°CWB, Outdoor temp: 7°CDB/6°CWB
- ii. Indoor and outdoor sound levels are determined in an anechoic chamber and may differ once the unit is installed due to ambient conditions
- iii. TCSPF: Total Cooling Seasonal Performance Factor & HSPF: Heating Seasonal Performance Factor as defined under GEMS 2019 Determination
- iv. R32 ducted indoor units must be installed in the ceiling space, it is not to be installed under floor

**Product Specification**  
**FDYBA - Single Phase**



| INDOOR UNIT                   |                       | FDYBA25AV1                     | FDYBA35AV1     | FDYBA50AV1     | FDYBA60AV1     | FDYBA71AV1     |
|-------------------------------|-----------------------|--------------------------------|----------------|----------------|----------------|----------------|
| OUTDOOR UNIT                  |                       | RZAC25G2V1                     | RZAC35G2V1     | RZAC50G2V1     | RZAC60G2V1     | RZAC71G2V1     |
| Rated Capacity                | Cool (kW)             | 2.50                           | 3.50           | 5.00           | 6.00           | 7.10           |
|                               | Heat (kW)             | 3.50                           | 4.00           | 6.00           | 7.00           | 8.00           |
| Capacity Range                | Cool (kW)             | 0.8-2.8                        | 0.8-4.0        | 1.6-6.2        | 2.0-6.7        | 1.7-7.6        |
|                               | Heat (kW)             | 0.9-3.7                        | 1.0-4.3        | 1.5-7.4        | 2.0-8.0        | 1.4-8.6        |
| Power Input (Rated)           | Cool (kW)             | 0.60                           | 1.02           | 1.37           | 1.70           | 2.12           |
|                               | Heat (kW)             | 0.97                           | 1.11           | 1.73           | 1.80           | 2.22           |
| E.E.R./C.O.P                  | C/H                   | 4.17/3.61                      | 3.45/3.60      | 3.65/3.47      | 3.53/3.89      | 3.35/3.60      |
| T.C.S.P.F (Residential)       | Hot/Average/Cold      | 4.82/4.11/4.04                 | 4.37/3.88/3.92 | 5.09/4.20/4.19 | 5.21/4.38/4.45 | 4.61/4.26/4.41 |
| H.S.P.F (Residential)         | Hot/Average/Cold      | 4.29/3.64/3.05                 | 4.53/4.06/3.69 | 4.76/4.12/3.58 | 5.28/4.58/3.98 | 6.09/4.13/3.28 |
| Airflow Rate (Rated)          | l/s                   | 150                            | 195            | 240            | 325            | 325            |
| Indoor Sound Level (H) @ 1.5m | Discharge (dBA)       | 41.6                           | 43.1           | 45.3           | 47.7           | 47.7           |
|                               | Suction (dBA)         | 40.8                           | 38.9           | 41.2           | 46.2           | 46.2           |
|                               | Casing Breakout (dBA) | 30.1                           | 31.6           | 33.8           | 35.6           | 35.6           |
| Piping Length                 | m                     | 20                             | 20             | 30             | 30             | 30             |
| Indoor Fan Speeds             |                       | 5 Steps, Quiet and Automatic   |                |                |                |                |
| Dimensions (HxWxD)            | Indoor (mm)           | 200x700x450                    | 200x900x450    |                | 200x1100x450   |                |
|                               | Outdoor (mm)          | 550x675x284                    |                | 595x845x300    |                | 695x930x350    |
| Weight                        | Indoor (kg)           | 18                             | 21             | 24             |                | 128            |
|                               | Outdoor (kg)          | 28                             |                | 64             |                | 128            |
| Power Supply                  | V/Hz                  | 1 Phase 220-240V, 50Hz         |                |                |                |                |
| Compressor Type               |                       | Hermetically Sealed Swing Type |                |                |                |                |
| Refrigerant                   |                       | R32                            |                |                |                |                |
| Pipe Sizes                    | Liquid (mm)           | 6.4 (Flared)                   |                | 6.4 (Flared)   |                |                |
|                               | Gas (mm)              | 9.5 (Flared)                   |                | 12.7 (Flared)  |                |                |
|                               | Drain (mm)            | ID 20 / OD 26                  |                |                |                |                |
| Supply Air Opening            | mm (HxW, Flange)      | 153x660                        | 153x860        |                | 153x1060       |                |
| Return Air Opening            | mm (HxW)              | 163x575                        | 163x775        |                | 163x975        |                |
| Outdoor Operating Range       | Cool (°CDB)           | -10 to 50                      |                |                |                |                |
|                               | Heat (°CWB)           | -15 to 18                      |                |                |                |                |
| EPA Sound Power Level         | dBA                   | 60                             | 60             | 62             | 63             | 67             |
| Outdoor Sound Level (H) @ 1m  | Pressure dBA (C/H)    | 45/48                          | 47/48          | 47/50          | 48/51          | 53/55          |

Notes:

- i. The Rated Capacity, Power Input and Running Current are measured in accordance with AS/NZS 3823.1.2  
Cooling: Indoor temp: 27°CDB/19°CWB, Outdoor temp: 35°CDB/24°CWB  
Heating: Indoor temp: 20°CDB/15°CWB, Outdoor temp: 7°CDB/6°CWB
- ii. Indoor and outdoor sound levels are determined in an anechoic chamber and may differ once the unit is installed due to ambient conditions
- iii. T.C.S.P.F: Total Cooling Seasonal Performance Factor & H.S.P.F: Heating Seasonal Performance Factor as defined under GEMS 2019 Determination
- iv. R32 bulkhead indoor units must be installed in the ceiling space, it is not to be installed under floor



# Why choose a Daikin Specialist Dealer?

Like us, our Dealers are specialists. They know the ups and downs, ins and outs of air conditioning. So their expertise ensures you get the right advice for your needs.

To take the stress out of air conditioning your home, speak to a Daikin Specialist Dealer. With over 450 Specialist Dealers across Australia, our specialists are ready to help you fit the right air conditioning solution for your home.

Daikin Specialist Dealers provide custom designed solutions for your home through an in-home quotation. Dealers will not only supply and install the best possible air conditioning solution but will also provide ongoing maintenance to ensure peak efficient performance over the life of the system.

All appointed Daikin Specialist Dealers are independently owned and operated businesses.



© Copyright in the contents of this brochure is owned by Daikin Australia Pty Limited and no part of the document may be reproduced in any form without the express written permission of Daikin Australia Pty Limited.

### ASSUMPTIONS

All representations made in Daikin marketing and promotional material are based on the assumptions that the correct equipment has been selected, appropriately sized and installed in accordance with Daikin's installation instructions and standard industry practices.

### QUALITY CERTIFICATIONS

Daikin Industries Limited was the first air conditioning equipment manufacturer in Japan to receive ISO 9001 certification. All Daikin manufacturing facilities have been certified to ISO 9001 Quality Management System requirements. ISO 9001 is a certificate for quality assurance concerning 'design, development, manufacturing, installation and related service' of products manufactured at that factory.

#### Residential Air Conditioning

Manufacturing Div (ISO 9001)  
JQA-0486 May 2, 1994  
(Shiga Plant)

#### Commercial Air Conditioning and Refrigeration

Manufacturing Div (ISO 9001)  
JMI0107 December 28, 1992  
(Kanaoka Factory and Rinkai Factory at Sakai Plant)

### ENVIRONMENTAL CERTIFICATIONS

Daikin Industries Limited has received ISO 14001 Environmental Certification for the Daikin production facilities listed below. ISO 14001 is an international standard specifying requirement for an environmental management system, enabling an organisation to formulate policy and objectives, taking into account legislative requirements and information about significant environmental impacts. It applies to those environmental aspects within the organisation's control and over which it can be expected to have an influence.

The certification relates only to the environmental management system and does not constitute any endorsement of the products shipped from the facility by the International Organisation for Standardisation.

|                                  |                                 |
|----------------------------------|---------------------------------|
| Head Office / Tokyo Office       | Certificate number: EC02J0355   |
| Shiga Plant (Japan)              | Certificate number: EC99J2044   |
| Sakai Plant (Japan)              | Certificate number: JQA-E-80009 |
| Daikin Industries Ltd (Thailand) | Certificate number: JQA-E-90108 |
| Yodogawa Plant (Japan)           | Certificate number: EC99J2057   |
| Daikin Australia Pty. Ltd.       | Certificate number: CEM20437    |

#### Daikin Australia Pty Limited (ISO 9001)

QEC 23256  
May 12, 2006  
Sydney, Brisbane, Adelaide, Melbourne, Newcastle, Townsville, Perth



#### Daikin Australia Pty Limited (ISO 45001)

OHS 20939 17  
February 2021  
Sydney



#### Daikin Australia Pty Limited (ISO 14001)

CEM 20437  
October 27, 2006  
Sydney, Brisbane, Adelaide, Melbourne, Perth



#### Industrial System and Chiller Products Manufacturing Div (ISO 9001)

JQA-0495 May 16, 1994  
(Yodogawa Plant and Kanaoka Factory and Kishiwada Factory)

#### Daikin Europe N.V (ISO 9001)

Lloyd 928589.1 June 2, 1993

#### Daikin Industries (Thailand) Ltd

JQA-1452 September 13, 2002  
(ISO 9001)



### CONTACT



Daikin Australia Pty Limited ABN 62 000 172 967

For all Sales enquiries, email: sales@daikin.com.au

For Customer Service or Technical Support, call: 1300 368 300

Scan to learn more about Daikin Ducted Systems

